NUFACTURING • QUALITY • SERVICE • MANUFACTURING • QUALITY • SERVICE • MANUFACTURING • QUALITY • SERVICE • MANUFACTU

DIXON

The Right Connection™

T-Bolt Clamps

dixonvalve.com • *Customer Service:* **877.963.4966**

T-Bolt Clamps

		Standard Series TBC & STBC	Heavy Duty Series HTBC & HSTBC	Long Bolt Series STBCL
"A"	center to center	1-3/16"	1-3/8"	2"
T-Bolt	thread size	1/4-28 UNF3A	5/16-24 UNF3A	1/4-28 UNF3A
	bolt length	2-1/2"	3-1/2"	3-1/2"
Band	width	3/4"	7/8"	3/4"
	thickness	.025	.040	.025

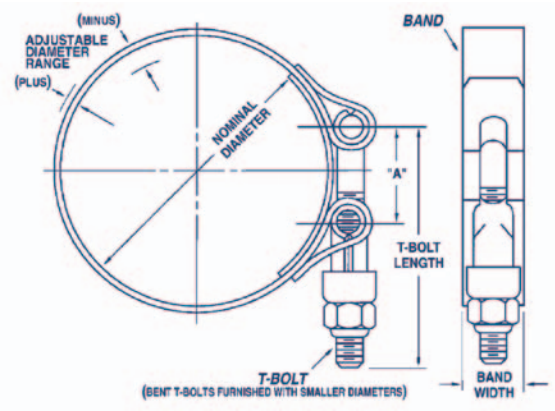

Standard Series

- T-bolts can be applied with a standard 7/16" socket wrench
- 3/4" wide 300 series stainless steel band, .025" thick
- **TBC** torque rating is **70 lbs**, **STBC** is **50 lbs**

Style TBC - *stainless steel band, carbon steel bolt*

Hose OD from	Hose OD to	Part #
1.250"	1.406"	***TBC131***
1.344"	1.562"	***TBC150***
1.594"	1.812"	***TBC175***
1.724"	1.942"	***TBC188***
1.844"	2.062"	***TBC200***
2.094"	2.312"	***TBC225***
2.224"	2.442"	***TBC238***
2.344"	2.562"	***TBC250***
2.326"	2.622"	***TBC256***
2.396"	2.692"	***TBC263***
2.516"	2.812"	***TBC275***
2.646"	2.942"	***TBC288***
2.766"	3.062"	***TBC300***
2.886"	3.182"	***TBC312***
3.016"	3.312"	***TBC325***
3.266"	3.562"	***TBC350***
3.516"	3.812"	***TBC375***
3.586"	3.882"	***TBC382***
3.766"	4.062"	***TBC400***
4.016"	4.312"	***TBC425***
4.266"	4.562"	***TBC450***
4.516"	4.812"	***TBC475***
4.766"	5.062"	***TBC500***
5.016"	5.312"	***TBC525***
5.266"	5.562"	***TBC550***
5.516"	5.812"	***TBC575***
5.766"	6.062"	***TBC600***
6.016"	6.312"	***TBC625***
6.266"	6.562"	***TBC650***
6.516"	6.812"	***TBC675***
6.766"	7.062"	***TBC700***
7.266"	7.562"	***TBC750***

Style STBC - *stainless steel band, stainless steel bolt*

Hose OD from	Hose OD to	Part #
1.250"	1.4063"	***STBC131***
1.344"	1.562"	***STBC150***
1.474"	1.692"	***STBC163***
1.594"	1.812"	***STBC175***
1.724"	1.942"	***STBC188***
1.844"	2.062"	***STBC200***
1.964"	2.182"	***STBC212***
2.094"	2.312"	***STBC225***
2.224"	2.442"	***STBC238***
2.344"	2.562"	***STBC250***
2.326"	2.622"	***STBC256***
2.396"	2.692"	***STBC263***
2.516"	2.812"	***STBC275***
2.646"	2.942"	***STBC288***
2.766"	3.062"	***STBC300***
2.886"	3.182"	***STBC312***
3.016"	3.312"	***STBC325***
3.266"	3.562"	***STBC350***
3.386"	3.682"	***STBC362***
3.516"	3.812"	***STBC375***
3.586"	3.882"	***STBC382***
3.766"	4.062"	***STBC400***
4.016"	4.312"	***STBC425***
4.266"	4.562"	***STBC450***
4.516"	4.812"	***STBC475***
4.766"	5.062"	***STBC500***
5.016"	5.312"	***STBC525***
5.266"	5.562"	***STBC550***
5.516"	5.812"	***STBC575***
5.766"	6.062"	***STBC600***
6.016"	6.312"	***STBC625***
6.266"	6.562"	***STBC650***
6.516"	6.812"	***STBC675***
6.766"	7.062"	***STBC700***
7.016"	7.312"	***STBC725***
7.266"	7.562"	***STBC750***
7.766"	8.062"	***STBC800***
8.016"	8.312"	***STBC825***
8.266"	8.562"	***STBC850***
8.646"	8.942"	***STBC888***
8.766"	9.062"	***STBC900***
9.266"	9.562"	***STBC950***
9.766"	10.062"	***STBC1000***
10.646"	10.942"	***STBC1088***
11.766"	12.062"	***STBC1200***
12.646"	12.942"	***STBC1288***

T-Bolt Clamps

Heavy Duty Series

- T-bolts can be applied with a standard 1/2" socket wrench
- 7/8" wide 300 series stainless steel band, .040" thick
- **HTBC** torque rating is **240 lbs**, **HSTBC** is **180 lbs**

Style HTBC

stainless steel band, carbon steel bolt

Hose OD from	Hose OD to	Part #
2.125"	2.4375"	***HTBC238***
2.250"	2.5625"	***HTBC250***
2.750"	3.0625"	***HTBC300***
3.250"	3.5625"	***HTBC350***
3.750"	4.0625"	***HTBC400***
4.250"	4.5625"	***HTBC450***
4.750"	5.0625"	***HTBC500***
5.250"	5.5625"	***HTBC550***
5.750"	6.0625"	***HTBC600***
6.250"	6.5625"	***HTBC650***
6.750"	7.0625"	***HTBC700***
7.250"	7.5625"	***HTBC750***
7.750"	8.0625"	***HTBC800***

Style HSTBC

stainless steel band, carbon steel bolt

Hose OD from	Hose OD to	Part #
2.125"	2.4375"	***HSTBC238***
2.250"	2.5625"	***HSTBC250***
2.750"	3.0625"	***HSTBC300***
3.250"	3.5625"	***HSTBC350***
3.750"	4.0625"	***HSTBC400***
4.250"	4.5625"	***HSTBC450***
4.750"	5.0625"	***HSTBC500***
5.250"	5.5625"	***HSTBC550***
5.750"	6.0625"	***HSTBC600***
6.250"	6.5625"	***HSTBC650***
6.750"	7.0625"	***HSTBC700***
7.250"	7.5625"	***HSTBC750***
7.750"	8.0625"	***HSTBC800***
8.266"	8.562"	***HSTBC850***
8.646"	8.942"	***HSTBC888***
8.766"	9.062"	***HSTBC900***
9.266"	9.562"	***HSTBC950***
9.766"	10.062"	***HSTBC1000***
10.646"	10.942"	***HSTBC1088***
11.766"	12.062"	***HSTBC1200***
12.646"	12.942"	***HSTBC1288***

Long Bolt Series

- T-bolts can be applied with a standard 7/16" socket wrench
- 3/4" wide 300 series stainless steel band, .025" thick
- **STBCL** torque rating is **50 lbs**

Style STBCL - *stainless steel band, stainless steel bolt*

Hose OD from	Hose OD to	Part #
2.80"	3.37"	***STBC325L***
3.05"	3.62"	***STBC350L***
3.37"	3.94"	***STBC382L***
3.55"	4.12"	***STBC400L***
3.75"	4.32"	***STBC420L***
3.87"	4.44"	***STBC432L***
4.05"	4.62"	***STBC450L***
4.37"	4.94"	***STBC482L***
4.55"	5.12"	***STBC500L***
4.87"	5.44"	***STBC532L***
5.05"	5.62"	***STBC550L***
5.37"	5.94"	***STBC582L***
5.55"	6.44"	***STBC632L***
5.87"	6.62"	***STBC650L***
6.05"	6.87"	***STBC675L***
6.30"	7.10"	***STBC698L***
6.53"	7.12"	***STBC700L***
6.55"	6.12"	***STBC600L***
6.62"	7.19"	***STBC707L***
8.05"	8.62"	***STBC850L***
8.30"	8.87"	***STBC875L***
8.43"	9.00"	***STBC888L***
8.62"	9.19"	***STBC907L***
10.25"	10.82"	***STBC1070L***
10.43"	11.00"	***STBC1088L***
10.62"	11.19"	***STBC1107L***
10.72"	11.29"	***STBC1117L***
12.20"	12.77"	***STBC1265L***
12.43"	13.00"	***STBC1288L***
12.75"	13.32"	***STBC1320L***
14.20"	14.77"	***STBC1465L***
14.43"	15.00"	***STBC1488L***
14.75"	15.32"	***STBC1520L***
16.20"	16.77"	***STBC1665L***
16.43"	17.00"	***STBC1688L***

Dixon is recognized as the premier manufacturer and supplier of hose fittings and accessories spanning a wide range of industrial uses. Dixon's range includes products for food, dairy processing, beverage and brewery, mobile tankers, mining, construction, chemical processing, petroleum, oilfields, refining and manufacturing.

dixonvalve.com • *Customer Service:* **877.963.4966**

DIXON

The Right Connection™

Dixon Valve

800 High Street, Chestertown, MD 21620

Fax: 800.283.4966

YouTube

Dixon Customer Service

© 2012 DVCC

Printed in the USA

TBOLTS_212P25C