



THERMICULITE® 866 / 866 LS

Sealing materials for
Solid Oxide Fuel Cells.



THERMICULITE® 866

Thermiculite® 866
- The proven sealing
material for Solid Oxide
Fuel Cell applications.


Thermiculite®
innovative. versatile. complete.

THERMICULITE® 866


- Thermiculite® 866 is recognised as the material of choice to achieve high sealing efficiency by leading developers of SOFC technology
- Thermiculite® 866 ensures that a seal is created and then the seal is maintained in service
- No burn off of organic material at elevated temperature
- No reduction in gasket thickness at elevated temperature
- Sealing performance not reduced by thermal cycling

THERMICULITE® 866 LS


- Sealing achieved at very low surface stresses
- Extremely high level of sealing efficiency achieved
- Sealing performance not reduced by thermal cycling
- Sealing coating compensates for irregularities in surfaces to be sealed
- Gasket cutting just as easy for Thermiculite® 866

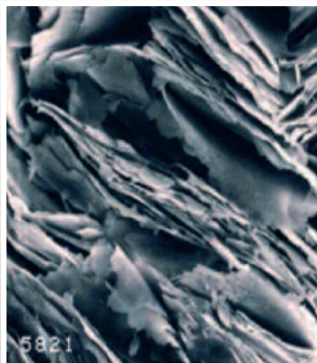

Crystal plates: Each crystal plate is nanometres thick

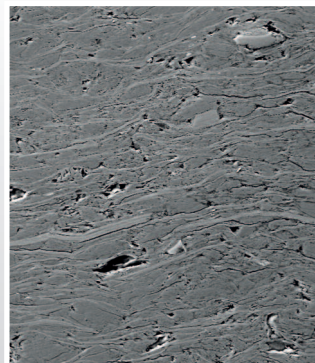

Structure of Thermiculite® 866

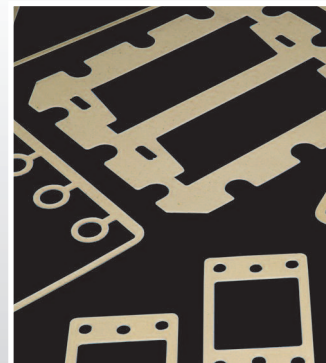

Thermiculite® 866 cut gasket samples

Thermiculite® 866 is a sealing material specifically designed as a compression seal for Solid Oxide Fuel Cells [SOFC]. It is proving to be very successful in a range of SOFC applications around the world.


Thermiculite® 866 is a product utilising the Thermiculite® technology, based upon the use of chemically exfoliated vermiculite, that has been developed by Flexitallic to produce a range of high performance, high temperature, patented, sealing materials for industrial sealing.

Vermiculite, a naturally occurring mineral is closely related to mica, a mineral noted for high temperature capability, high chemical resistance and an electrical insulation. Both mica and vermiculite occur naturally as flakes which consist of a stack of very many crystal plates where each crystal plate is nanometres thick. Those flakes of vermiculite, unlike those of mica, are able to be exfoliated so that the crystal plates separate from each other.


This exfoliation can be partly achieved by the application of heat, the result is then the well known form of vermiculite used in many everyday applications such as in gardening compost, as a thermal insulation material, as a packaging material and in fire prevention applications. However, the very thin crystal plates can be separated efficiently from each other by chemical means to produce a form which consists of just these very thin crystal plates. The separated plates are highly flexible and have the most useful property of adhering to each other to produce a thin, flexible, film. If a second material is added to the chemically exfoliated vermiculite then the second material will be bound by the chemically exfoliated vermiculite without the need for the addition of a binder. This binding action of chemically exfoliated vermiculite means that when it is mixed with other, morphology compatible, materials that it is possible to make, by methods developed by Flexitallic, a very flexible sheet material. This sheet material, Thermiculite® 866, is readily cut into gaskets of complex shapes.

THERMICULITE® 866 THE PROVEN SEALING MATERIAL FOR SOFC APPLICATIONS

Stable to high temperatures up to 1000°C	>	No thermal degradation of the seal at SOFC operating temperatures	>	Extended lifetime performance
No organic filler material	>	Excellent seal integrity maintained	>	Material does not become porous over time resulting in no reduction in gasket thickness
Soft and compressible	>	Easily cut into complex shapes and profiles	>	Complex sealing arrangements are easily accommodated
Currently operating in service units	>	Case studies providing the benefits of Thermiculite® 866	>	Many reports of very low leakage rates even through many thermal cycles

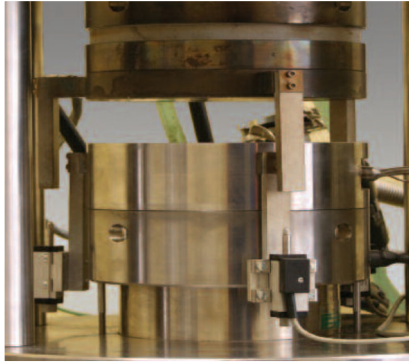

Advanced test equipment aided Flexitallic's development of Thermiculite® 866

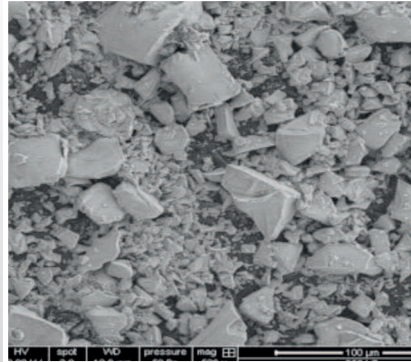

The coating on Thermiculite® 866 prior to use

THERMICULITE® 866 LS





The components of Thermiculite® 866 ensure that a seal is created and then maintained in service. Consisting of highly aligned platelets of chemically exfoliated vermiculite bound with other unique key ingredients Thermiculite® 866 is very soft, resulting in a compressible and flexible material that is completely free of organic content.

Due to its unique chemical and physical properties, Thermiculite® 866 is highly temperature resistant (1000°C) and, as there is no organic content, there is no burn off of volatile components at SOFC operational temperatures.


This ensures that during the lifetime of the fuel cell there is no increase in porosity and no additional leakage at elevated temperature. Figures 1 and 2 show that there is no difference in sealing performance at elevated temperature.

As there is no burn off of organic material at elevated temperature there is also no reduction in the gasket thickness at temperature and no resulting relaxation of the bolts. The seal is therefore stable during cycling between ambient and operational temperatures.


Thermiculite® 866 has resulted in excellent service performance. Figures 3 and 4 show stack results obtained by a customer and reproduced with their full permission.

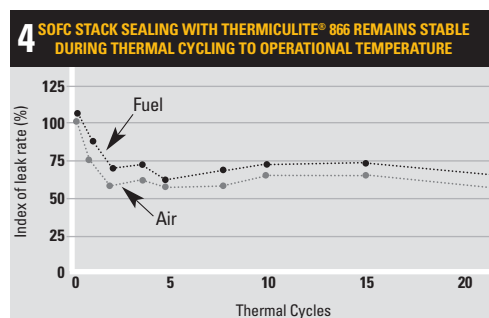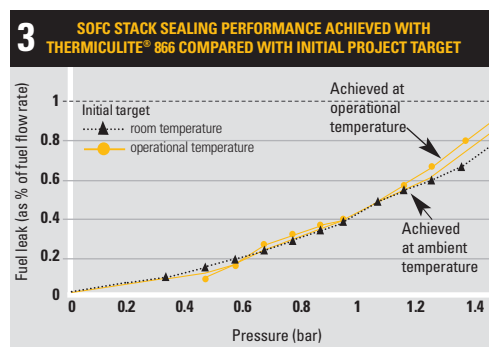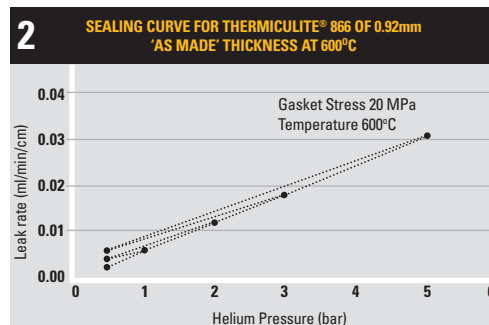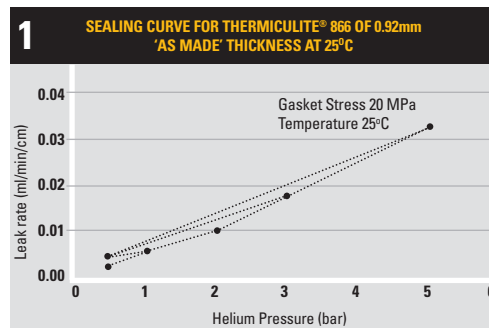

Flexitallic have introduced Thermiculite® 866 LS to allow the range use of Thermiculite® 866 to be extended to those stack designs only offering a very low sealing stress. A minor amount of glass powder is bound to each surface during the manufacturing process so that at the operational temperature of the SOFC cell Thermiculite® 866 LS has a very thin coating of molten glass on each surface which seals the interfacial leakage paths.

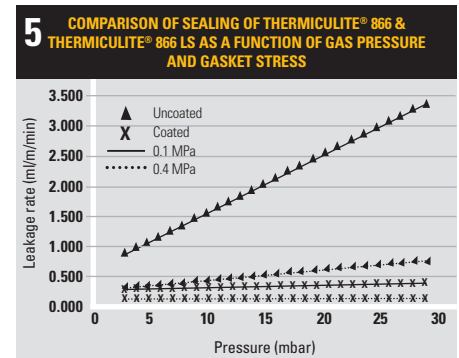

When glass is used as the sole sealing material it is well known that cracking of the seal with enhanced leakage results during thermal cycling. This is not the case with Thermiculite® 866 LS where the level of sealing is maintained during thermal cycling. Figures 6 and 7 show under the same conditions the sealing performance of Thermiculite® 866 LS and Thermiculite® 866 respectively during thermal cycles.

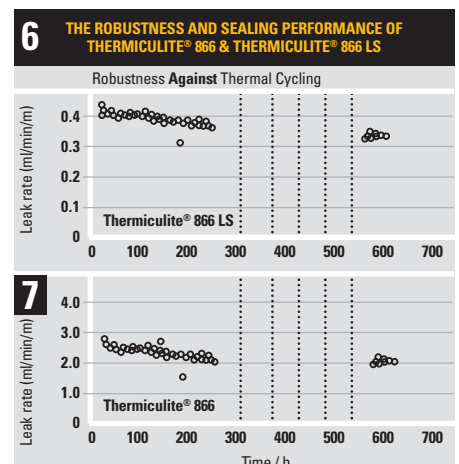

Ap = 25 mBar



UNITED KINGDOM

Flexitallic Ltd

Scandinavia Mill
Hunsworth Lane
Cleckheaton
West Yorkshire
BD19 4LN
UK
Tel. +44 1274 851273
Fax. +44 1274 300303
www.flexitallic.eu

CANADA

AGS Flexitallic

4340 - 78 Avenue
Edmonton,
Alberta, T6B 3J5
CANADA
Tel. +780 466 5050
Fax. +780 465 1177
www.agsflexitallic.com

CHINA

Flexitallic Sealing Technology Co. Ltd

Building 3 South
Wujiang Export
Processing Zone
688 Pangjin Road
Wujiang, Jiangsu 215200
P.R. CHINA
Tel. +86 512 6303 2839
Fax. +86 512 6303 2879
www.china.flexitallic.com

UNITED STATES

Flexitallic L.P.

6915 Highway 225
Deer Park
Texas 77536
USA
Tel. +1 281 604 2400
Fax. +1 281 604 2415
www.flexitallic.com

UNITED ARAB EMIRATES

Flexitallic LLC

P.O. Box 6591
Amenity Centre
Tower Number 2
10th Floor, Office 4
Al Hamra Industrial Area
Ras Al Khaimah
UNITED ARAB EMIRATES
Tel. +971 (0)7 243 4305
Fax. +971 (0)7 243 4306
www.flexitallic.ae

SAUDI ARABIA

Flexitallic Middle East LLC

Al-Aujam Industrial City
6790-Al Badia
Unit No. 1
Al Qatif 32656-2462
KINGDOM OF SAUDI ARABIA
Tel. +966 3 8089635
Fax. +966 3 8089634
www.flexitallic.sa

About The Flexitallic Group

The Flexitallic Group is a global leader in specialised sealing solutions and products serving the oil and gas, power generation, chemical and petrochemical industries in emerging and developed markets. Focused on the upstream, downstream and power generation sectors, it has operations in France, the United States, Canada, Mexico, the United Kingdom, Germany, the United Arab Emirates, Saudi Arabia, Kazakhstan and China plus a network of worldwide licensing partners and distributors.

www.theflexitallicgroup.com